Fax this to SMK Co., Ltd at Fax: +81-42-703-0026

E-mail: smk_overseas@e-smk.co.jp

Your Specifications for **Perfect-navi** Platen Type Slide Unit

Thank you for your inquiry about **Perfect-navi Slide Unit**. We would like to confirm the specification so please answer below questions and send us back.


Contact person

Date:

1) Trading Company				2) Manufacturer						
company name				Company name						
Depart- ment	F	Position		Depart- ment			Position			
Your name		Fax		Your name			Fax			
E-mail				E-mail						
3) Pow	ver supply frequency	- 🗖 :	50Hz 🗖 60Hz			_				
4) Your spot welding machine — Maker ()			\triangle			
5) Squeeze time — (cycle) 6) Nut feeding method — ☐ Feeder ☐ Manual feed							 Set the start-up self-hold on the welding machine to activate when the current starts to flow. 			
7) Nut feeder — Maker ()						 Upper tip needs clearance for guide pin. 				
8) Water hose joint —						nnector	Please provide us 5 pcs. tor each of nut samples.			
9) Air p	piping ————	— — 1	from the feeder \square	from the prin	mary s	side				
	10) Specification 1 11) Specification 1			ification 2		12) Specification 3				
• Nut Squ Fla He: • Hol	t size (M) shape Lare □ Hex □ Round Inge type □ T-nut It cap nut □ Other (Ingertype of the content of the) ⊅)	• Nut size (M • Nut shape □ Square □ Hex □ Flange type □ Hex cap nut • Hole diamete and board thic Board thickness t Hole Φ	□ T-nut □ Other (er of work φ)	 Nut size (M) Nut shape Square Hex Round Flange type T-nut Hex cap nut Other () Hole diameter of work φ and board thickness t Board thickness t Hole φ (φ) (t) (φ) (t) 				

13) The shape of metal connector and number of pins of the foot-operated switch or the connector between nut feeder and welding machine in use.

Please answer below questions only when using a controller for manual operation.

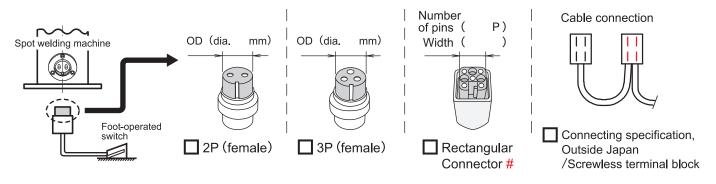

If you select a rectangular connector, please send us a photo and electrical drawing to confirm start signal.

Example

